Examination luminaire


VISIANO 20-2 P TX AU D15466000-00633110


Part No. ML515-S





illuminance @ 50 cm	60 000 lx
color rendering index (CRI)	> 95
colour temperature	3500 K & 4500 K
work equipment	electronic converter
mains lead	1,8 m Aus/NZ
luminaire body	polycarbonate & acrylonitrile butadiene styrene copolymer (PC & ABS)
weight (net)	2.0 kg
Power consumption	21 W
usage	keypad at luminaire head
balance of articulation joints	spring
class of protection	II
Accessory	roll support(included)
norms	EN 60601-1, EN 60601-2-41
special features	2 color shades, 4 dimming levels, antimicrobal, Rotary feedthrough (360° Turnover axis)
Fastening	Fastening pin (Ø 16mm)
System of protection	IP 20
Part number	ML515-S


light distribution









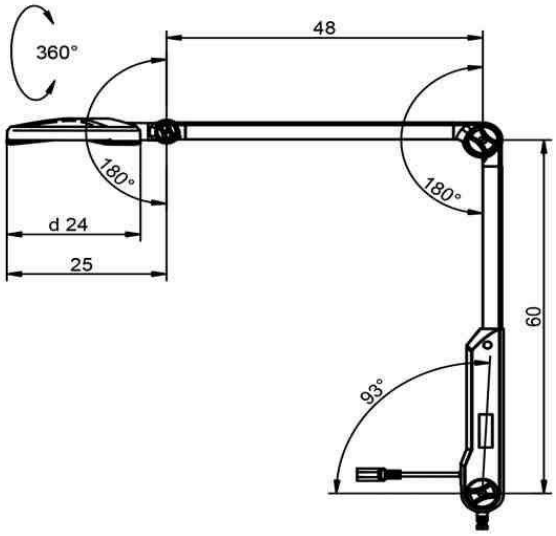

Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.

www.redbank.net.au | ©09.2024 Redbank Group